

Breeze™ Supercharged Media Player

BRZ-321

4K HDMI Output with PiP 1080p HDMI Input

Now you can enjoy the ease and flexibility of Breeze™ Digital Signage Software with the new BRZ-321 Player. This player is perfect for high-resolution digital signage needs.

Benefits of Breeze™ Signage Software

Enjoy cloud-based software, software support and everything you need to keep your digital system running for years. Software updates are included with all of our Service Level Agreement (SLA) Subscriptions.

Ultra High HD Resolution Viewing


- 3840 x 2160 (4K-UHD) Output and HDMI Input (1080P) from STB

The Perfect Hardware Package

- Small Form Factor
- Noiseless, Fanless, Solid-State Design
- Built-In Mounting Bracket
- Phoenix type 12 pin, 8 GPIO.


Safe and Secure Breeze™ players have been designed with encrypted data communications to keep you secure. Client-to-server, server-to-player, and server-to-feed-server communications are all encrypted using SSL/TLS technology. In addition, this player is Independent Watchdog Protected.

Unlimited Zones for Your Media. Videos, Graphics, RSS Feeds & HLS Streaming. High-Quality Media Viewing. Now your audience can get all the information they need at a glance. Perfect for breaking news, current events or priority content.

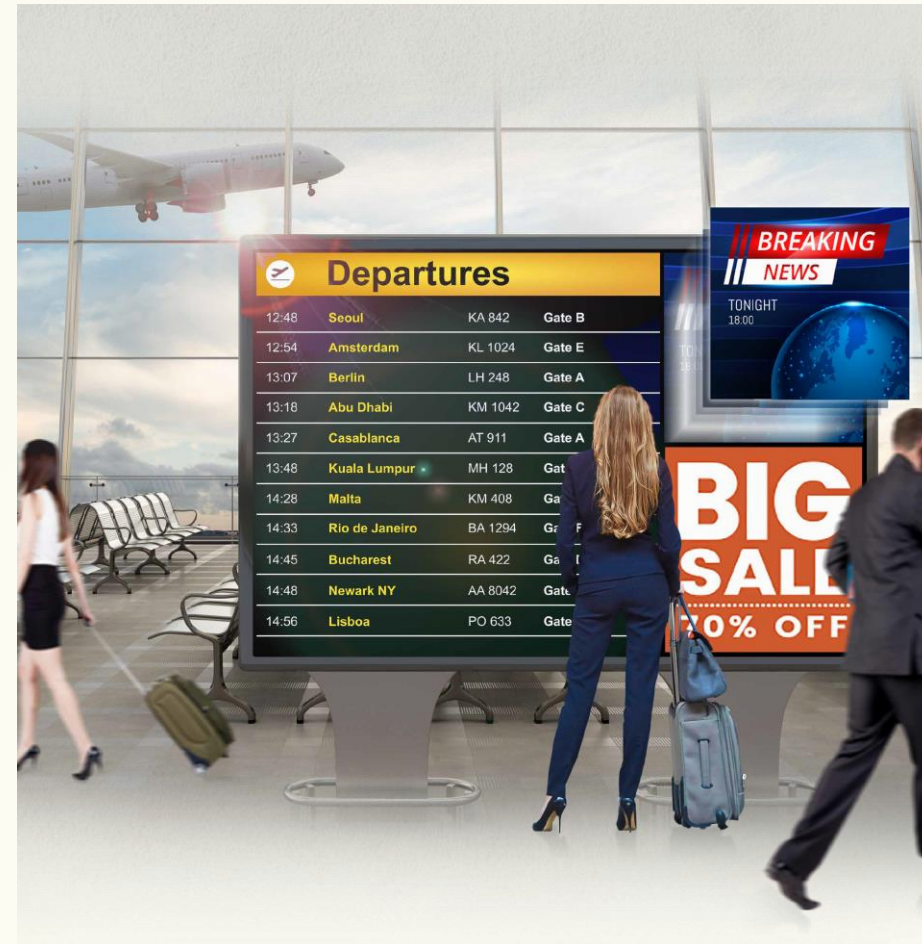

BRZ-321

Sample Applications

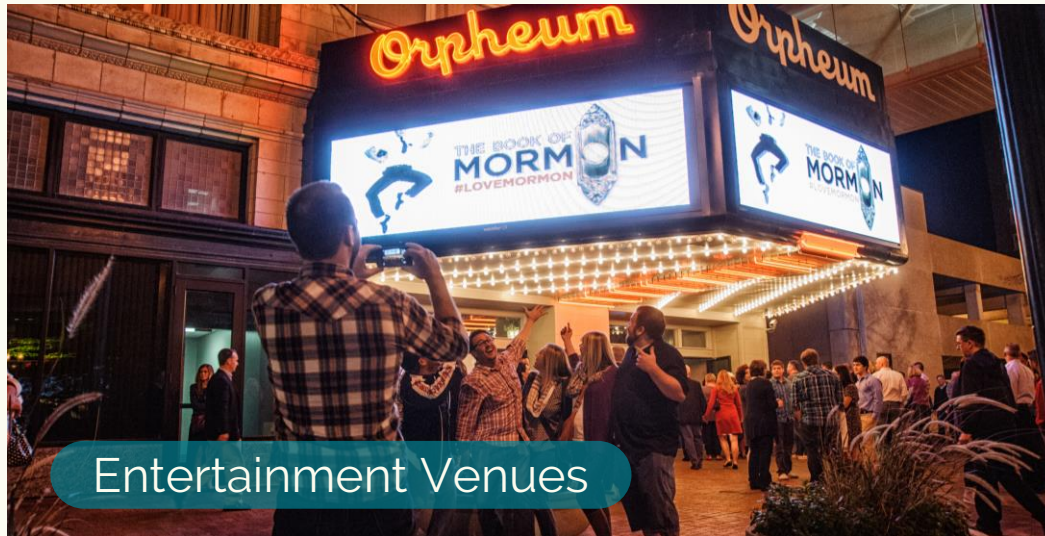

Entertainment Venues



Healthcare





Public Areas







Wayfinding

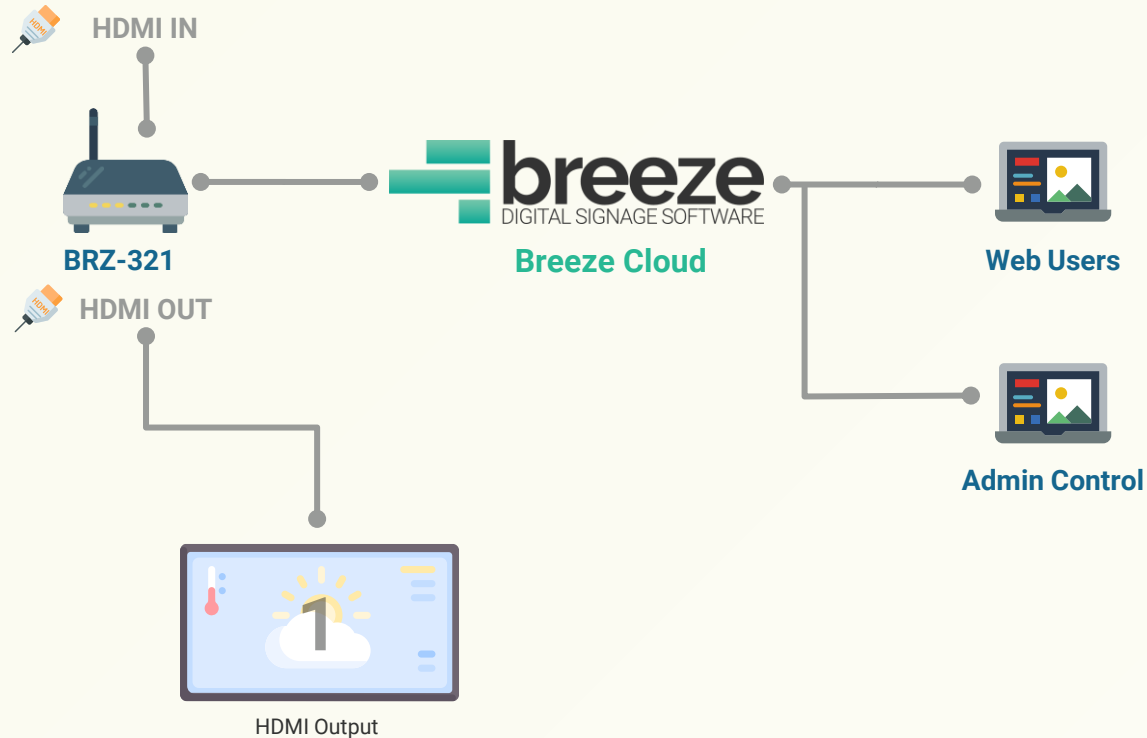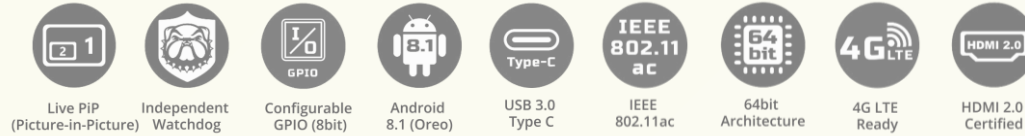BRZ-321


BRZ-321



BRZ-321 Player Features

-  **HDMI 2.0 Output / 720p/1080p Input
HDCP Compliant**
-  **Touchscreen:** Compatible with most USB touch screen
-  **4G LTE Ready:** For when there is no network connection
-  **Configurable GPIO ports**
-  **Rotation:** Support manual rotate by 0°, 90°, 180°, 270°

BRZ-321

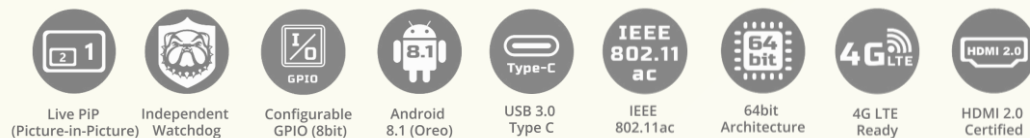

BRZ-321

PLAYER FEATURES

– I/O Interface	Ethernet	10/100/1000 Gigabit BASE-T
	WLAN	802.11 a/b/g/n/ac
	4G LTE	M.2 module
	Bluetooth	Yes
	USB	1 x USB2.0, 1 x USB3.0 Type C
	Analog Audio	1 x 2.5mm (4-ring Apple-like)
	COM port	1 x Tx & Rx through 2.5mm phone jack
	Reset Button	Yes
	Power Status LED	Yes
	Ethernet	10/100/1000 Gigabit BASE-T
– Mechanical	Dimension (WxDxH)	180 x 118 x 27 mm (7.08" x 4.66" x 1.06" inch)
	Mounting	Easy wall mount / VESA mount 10x10 cm
	Operating temperature	-40°C to 70°C (-40°F to 158°F)
	Storage temperature	-40°C to 80°C (-40°F to 176°F)
	Power Adapter	DC12V, 3A
	Regulatory	CE/FCC/RoHS/BSMI

